



Non-Generator Headlight Inductor

Before refurbish

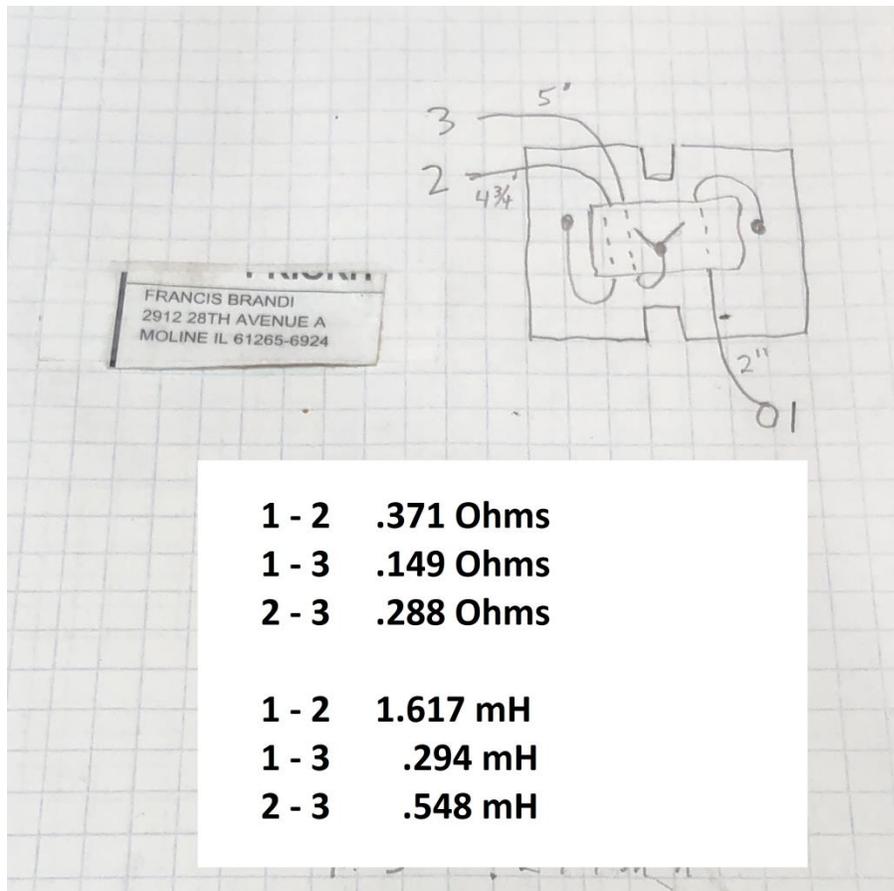

After refurbish

1-2	1.642 mH	.373 Ohms
1-3	0.299 mH	.149 Ohms
2-3	0.554 mH	.320 Ohms

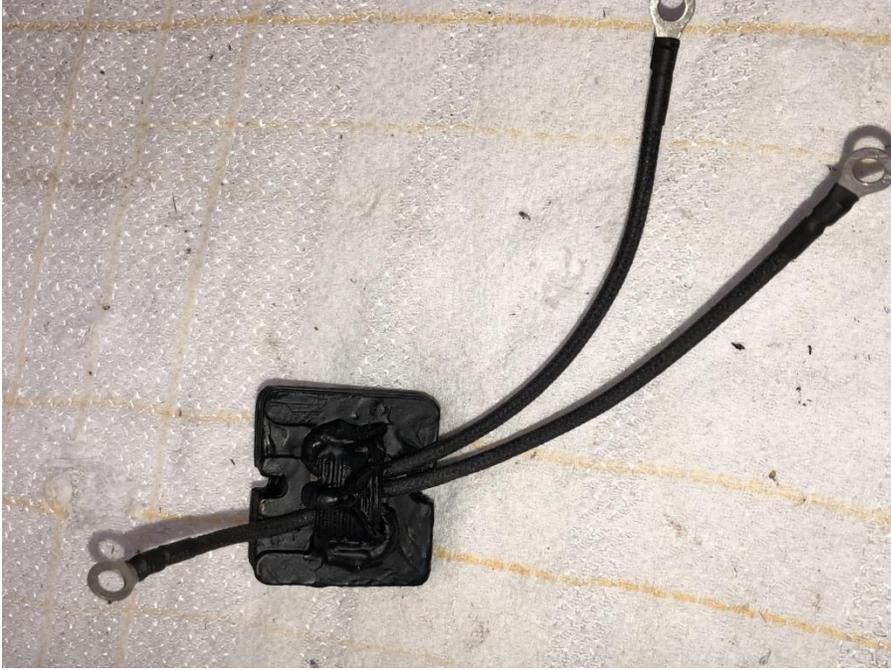





548

POWER
OFF ON

C R L

- 20MΩ
- 200μF
- 2MΩ
- 200KΩ
- 200H
- 20H
- 20μF
- 20KΩ
- 2H
- 200nF
- 2KΩ
- 200mH
- 20nF
- 200Ω
- 20mH
- 2nF
- 20Ω
- 2mH
- 200pF

TENMA 72-370

NDI
ENUE A
65-8924

Ω	K	M
1000	100K	
10K	10K	
100	1000	

MFD
0.001
0.0001

2
0



FRANCIS BRANCI
2012 28TH AVENUE A
MOLINE IL 61265-6924

Ω	K	M	UF / MFD	μF
100	1000	100K	0.001	1000
10K	100K	100K	0.0001	100
1000	10K	10K	0.00001	10

